

Introduction to Altro safety flooring

Heavy duty solutions

Altro Unity 25, Altro Classic 25, Altro Designer 25

Our 2.5mm safety flooring provides outstanding durability and sustained slip resistance, and are the ideal choice for extreme heavy duty areas where extra protection is needed. Their excellent resistance to mechanical or physical damage makes them firm favourites in demanding environments like education, industry and healthcare.

These three heavy duty ranges offer contemporary, industrial or decorative design options. Easy to maintain and clean, they provide lasting appearance retention and are backed by lengthy 20 year product guarantees and 25 year life expectancies. And where ease of maintenance and aesthetics are key, Altro Unity 25 offers a fresh palette and PUR technology.

Versatile solutions

Altro Walkway 20, Altro XpressLay

Providing sustained slip resistance, excellent durability and ease of installation, these low maintenance safety floors are easy to clean and perfect for busy areas. Plus, they offer a great choice of colour, and chipped and non-chipped varieties for design flexibility.

Apart from traditionally adhered ranges, we also offer a truly sustainable, recyclable and reusable, adhesive-free option: Altro XpressLay. It's suitable for lots of different applications and is ideal for use where original substrates may need protecting or where sustainable criteria must be met. Altro XpressLay is also the only safety floor that's 100% recyclable or reusable post-consumer.

Inspirational solutions

Altro Suprema, Altro Wood Safety

These safety floors are designed for areas where aesthetics, sustainable slip resistance and durability are all equally important. They offer a huge colour choice (Altro Suprema has 40 plain, flake and chipped options), can reproduce the natural warmth of nature (Altro Wood Safety), and their non-sparkle finish makes them perfectly suited for dementia and care homes. They're also ideal for public areas like receptions, corridors, shops, cafes, wards and day rooms, where appearances are especially important.

Special application solutions

We've also developed flooring solutions for demanding environments with particular requirements.

For kitchens / catering - Altro Stronghold 30

The wet and greasy conditions of kitchens prone to frequent spillages are catered for by a 3mm safety floor which boasts Altro's highest rating for slip resistance.

For industrial applications - Altro Atlas 40

A 4mm option gives enhanced resistance to chemicals, indentation and mechanical damage, making it ideal for use in locations like areas with light engineering and chemical processing.

For barefoot / shod - Altro Aquarius

For wet areas where people could be barefoot or wearing any type of shoe, Altro's revolutionary Altro Aquarius is the ideal solution. It can be used in wet and dry locations including bathrooms, shower and changing areas, found in healthcare, leisure and social housing environments.



Altro safety flooring

Technical chart			Altro Unity 25	Altro Classic 25	Altro Designer 25	Altro Walkway 20	Altro Walkway 20 SD	Altro XpressLay
Sustained slip (years)			25	25	25	15	15	15
Guarantee (years)			20	20	20	10	10*	10
Life expectancy (years)			25	25	25	15	15	15
Surface			Maxis PUR			Maxis PUR		Maxis PUR
Thickness		EN 428	2.5mm	2.5mm	2.5mm	2mm	2mm	2.2mm
Weight		EN 430	3.2kg/m ²	3.2kg/m ²	3.3kg/m ²	2.6kg/m ²	2.6kg/m ²	2.6kg/m ²
Wear characteristics / usage		EN 13845	34/43	34/43	34/43	34/43	34/43	34/43
		EN 651						
		EN 649						
		EN 1817						
		EN 12199						
	Wet room	EN 13553	W2	W2	W2	W2	W2	W2
Durability	Residual indentation	EN 433	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm
	Dimensional stability	EN 434	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%
	Flexibility	EN 435	Pass	Pass	Pass	Pass	Pass	Pass
Strength / flexibility	Seam / weld strength	EN 684	Pass	Pass	Pass	Pass	Pass	Pass
Resistance to wear	Castor chair abrasion	EN 425	Pass	Pass	Pass	Pass	Pass	Pass
	Taber abrasion	EN 13845	50 000 Cycles	50 000 Cycles				
Slip resistance		BS 7976 PTV	≥ 40	≥ 45	≥ 40	≥ 36	≥ 36	≥ 36
		Surface Roughness	≥ 20µm	≥ 20µm				
		DIN 51130	R10	R11	R10	R10	R10	R10
		DIN 51097						
		EN 13485 Annex C	ESf	ESf	ESf	ESf	ESf	ESf
	EN 13893	DS	DS	DS	DS	DS	DS	
Fire performance		EN 13501-1	Class Bfl s1	Class Bfl s1				
		EN ISO 9239-1	≥ 8kW/m ²	≥ 8kW/m ²				
		EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass
Cigarette burn resistance		EN 1399						
Sound insulation		ISO 140-8	9dB	5dB	7dB	5dB	5dB	7dB
Colour / light fastness		EN 20105 B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical / stain resistance		EN 423	Good	Good	Good	Good	Good	Good
Electrical properties		BS 2050					2 x 10 ⁷ Ohms	
		EN 1081					≤10 ⁹ Ohms	
		EN 1815	≤ 2kV	≤ 2kV				
Underfloor heating	Thermal insulation	EN 12667	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
VOC		AgBB/DiBt	Approved	Approved	Approved	Approved	Approved	Approved
		BREEAM HEA9	E1	E1	E1	E1	E1	E1
BRE generic green guide	Health		A+	A+	A+	A+	A+	A+
	Education		A+	A+	A+	A+	A+	A+
	Commercial		A	A	A	A	A	A
	Domestic		B	B	B	B	B	B
	Retail durability / fashion		A/A+	A/A+	A/A+	A/A+	A/A+	A/A+

*Guarantee period does not apply to static-dissipative properties

							Altro smooth flooring			Altro rubber flooring	
Altro Impressionist II	Altro Suprema	Altro Wood Safety	Altro Stronghold 30	Altro Atlas 40	Altro Aquarius	Altro Marine 20	Altro Wood Smooth	Altro Wood Smooth Acoustic	Altro Zodiac Smooth	Altro Nuvola Cirrus	Altro Nuvola Stratus
15	15	15	20	20	15						
10	10	10	15	15	10	10	5	5	5	5	5
15	15	15	20	20	15	15	10	10	10	10	10
	Maxis PUR	Maxis PUR			Maxis PUR		PUR	PUR	PUR		
2mm	2mm	2mm	3mm	4mm	2mm	2mm	2mm	3.7mm	2mm	2mm	2.5/4mm
2.6kg/m ²	2.5kg/m ²	2.66kg/m ²	3.9kg/m ²	5.4kg/m ²	2.6kg/m ²	2.6kg/m ²	2.66kg/m ²	2.75kg/m ²	2.66kg/m ²	3.3kg/m ²	3.8kg/m ²
34/43	34/43	34/43	34/43	34/43	34/43	34/43					
								34/42			
							34/43		34/43		
										34/42	
											32/41
W2	W2	W2	W2	W2	W2	W2					
≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.10mm	≤0.2mm	≤0.10mm	≤0.15mm	≤0.20mm
≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%	≤0.4%
Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass		
Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
50 000 Cycles	50 000 Cycles	50 000 Cycles	50 000 Cycles	50 000 Cycles	50 000 Cycles	50 000 Cycles					
≥ 36	≥ 36	≥ 36	≥ 55	≥ 36	≥ 50	-					
≥ 20µm	≥ 20µm	≥ 20µm	≥ 20µm	≥ 20µm	≥ 20µm	≥ 20µm					
R10	R10	R10	R12	R10	R11	R10	R10	R10	R10	R9	R9
					B	C					
ESf	ESf	ESf	ESf	ESf	ESf / ESb	Esb					
DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS	DS
Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1	Class Cfl s1	Class Bfl s1	Class Bfl s1	Class Bfl s1
≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 4.5kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²	≥ 8kW/m ²
Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
										Good	Good
5dB	5dB	4dB	10dB	7dB	5dB	13dB	4dB	18dB	4dB	6dB	8dB
≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good	Good
≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV	≤ 2kV
Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable	Suitable
Approved	Approved	Approved	Approved	Approved	Approved	Approved	Approved	Approved	Approved		
E1	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1	E1
A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+
A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+	A+
A	A	A	A	A	A	A	A	A	A	A	A
B	B	B	B	B	B	B	A	A	A	A	A
A/A+	A/A+	A/A+	A/A+	A/A+	A/A+	A/A+	A+/A+	A/A+	A+/A+	A+/A+	A/A+



Mount Vernon Hospital

Altro Unity™ 25

Patent number GB 2 462 167

Typical applications:

- Corridors subject to foot and wheeled traffic, such as hospital streets.**
- Clinical areas in hospitals with foot and wheeled traffic.**
- Secondary school labs. Dining rooms.**

Need a good-looking flooring that can cope with wheels as well as feet? You need Altro Unity 25 - a stylishly tough safety flooring that gives a great first impression.

Altro Unity 25 can be specified where long-lasting slip resistance and stain resistance are essential in heavy traffic areas. It contains aluminium trioxide and coloured quartz, and includes Altro Easyclean Maxis PUR technology for easier cleaning and maintenance.

The flooring is highly durable and resistant to moisture, temperature extremes, point loading, wheeled traffic, most chemicals and physical / mechanical damage. This makes it perfect for public walkways that need to look good and work hard.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



! We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.


! Looks great with:

- **Altro Whiterock White**
- **Altro Whiterock Satins**
- **Altro Designer 25**
- **Altro Classic 25**
- **Altro Suprema**


! Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




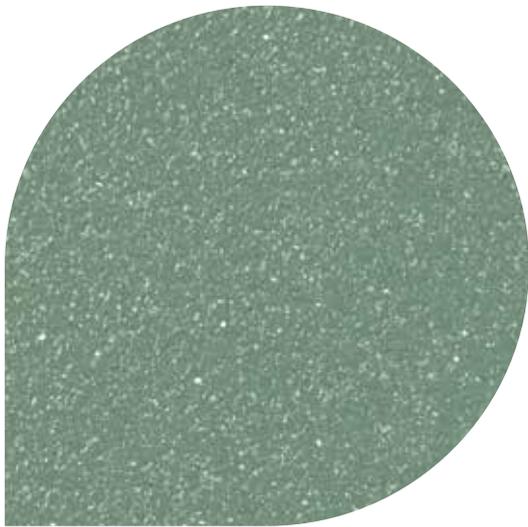


Roof Garden
UB2500 LRV: 23
WR262 / A1M154



Ice Rink
UBI2514 LRV: 70
WR291 / A1M01




Statue
UBI2513 LRV: 62
WR304 / A1M12




Arena
UB2510 LRV: 41
WR297 / A1M20




Plaza
UBI2512 LRV: 32
WR27 / A1M27



Monument
UBI2508 LRV: 23
WR305 / A1M239




Gallery
UB2511 LRV: 10
WR62 / A1M62




Forge
UB2515 LRV: 9
WR248 / A1M238




Signal
UBI2516 LRV: 13
WR300 / A1M42




Streetlight
UBI2505 LRV: 45
WR287 / A1M79




Temple
UB2509 LRV: 27
WR261 / A1M81




Rock
UBI2504 LRV: 23
WR84 / A1M84




Pavement
UBI2507 LRV: 14
WR83 / A1M83




Runway
UB2506 LRV: 9
WR72 / A1M72




Fountain
UBI2502 LRV: 22
WR306 / A1M71



Pool
UBI2503 LRV: 10
WR307 / A1M73



Stream
UB2501 LRV: 22
WR288 / A1M71



Vault
UBI2517 LRV: 5
WR277 / A1M100

i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches. Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2.5mm

Samples
If colour choice is critical, please request a sample of the material.
01462 707 700
samples@altro.com





Altro Classic™ 25

Typical applications:

Locations where substances like chalk, paint, clay or dirt are present, such as craft, design and technology (CDT) / art rooms and circulation areas.

Classic by name, classic by nature. Altro Classic 25 was the first ever safety flooring; it's been tried and trusted for over 60 years, and its traditional, industrial look is still popular today.

Altro Classic 25 provides lasting slip resistance, durability and abrasion resistance, making it ideal for use in heavy traffic areas – particularly with wheeled traffic. It's also good for areas where occasional moisture and dust can increase the risk of slipping as it has a Pendulum Test Value (PTV) rating ≥ 45 and an R11 slip rating.

Available in practical, dirt-hiding shades, with the addition of new colours for even greater choice, Altro Classic 25 is easy to clean and maintain.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



 We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.


 Looks great with:

- Altro Whiterock White
- Altro Whiterock Satins
- Altro Unity 25
- Altro Designer 25
- Altro Suprema
- Altro Stronghold 30


 Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




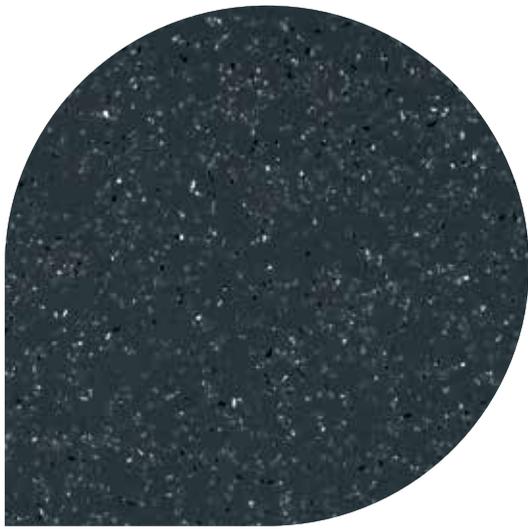


Anvil
X2594R11 LRV: 11
WR101 / A1M72




Mushroom
X2542R11 LRV: 32
WR24 / A1M27




Walnut
X2586R11 LRV: 10
WR62 / A1M62




Quarry Red
X2560R11 LRV: 13
WR42 / A1M42




Pewter Grey
X2539R11 LRV: 26
WR81 / A1M81




Whisper
X2548R11 LRV: 24
WR354 / A1M84




Graphite
X2546R11 LRV: 21
WR86 / A1M86



Legend
X2544R11 LRV: 10
WR231 / A1M73




Blue
X2541R11 LRV: 20
WR71 / A1M71

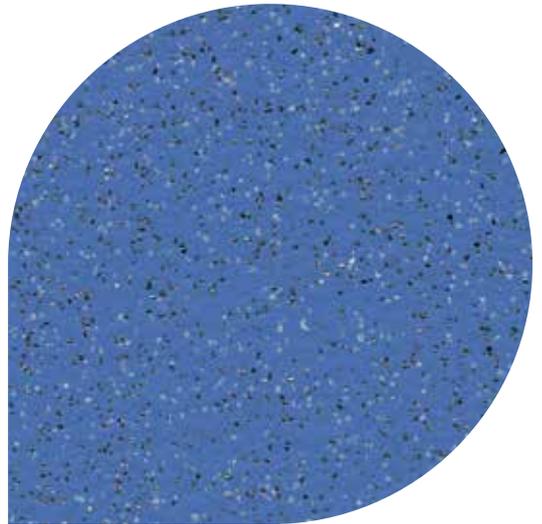

Aster
X2549R11 LRV: 17
WR286 / A1M286



Blackberry
X2547R11 LRV: 7
WR100 / A1M100



Truffle
X2545R11 LRV: 17
WR153 / A1M239



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2.5mm



Samples

If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**

✉ **samples@altro.com**



Macquarie University

Altro Designer™ 25

Typical applications:

**Service corridors and circulation areas subject to wheeled and high-volume traffic.
Back of house areas. Tertiary / industrial laboratories.**

When it comes to rugged, hardwearing safety flooring, Altro Designer 25 is the real deal. It's engineered with quartz, silicon carbide and aluminium trioxide for long-term durability and slip resistance, making it great for heavy duty environments with moveable or wheeled furniture.

Altro Designer 25 has a reassuring look and comes in practical, dirt-hiding colours featuring decorative coloured quartz. Designed for low maintenance, it incorporates Altro Easyclean™ Original Technology for a lasting attractive appearance and savings in time and cleaning costs.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Looks great with:

- Altro Whiterock White
- Altro Whiterock Satins
- Altro Unity 25
- Altro Classic 25
- Altro Suprema



Contributes to reducing the environmental impact of your specification:


- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk






Jet

D2501 LRV: 6
WR100 / A1M100




Midnight

D25421 LRV: 11
WR72 / A1M72




Twilight

D25910 LRV: 8
WR39 / A1M34




Storm

D25903 LRV: 16
WR82 / A1M82




Bone

D25215 LRV: 37
WR20 / A1M20




Biscuit

D25904 LRV: 30
WR146 / A1M20




Rust

D25907 LRV: 10
WR150 / A1M238



Skyline

D25332 LRV: 25
WR52 / A1M52



Fog

D25153 LRV: 27
WR81 / A1M81



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2.5mm



Samples

If colour choice is critical, please request a sample of the material.

01462 707 700

samples@altro.com





Nestlé

Altro Walkway™ 20

Patent number GB 2 462 167

Typical applications:

General purpose.

Altro Walkway 20 is our hugely popular, hard-wearing 2mm safety flooring which provides lifelong slip and abrasion resistance.

The range has 42 colours and shares its colour range with Altro XpressLay. This enables you to combine use of both ranges when you need traditionally adhered and adhesive-free safety flooring in adjacent areas.

Altro Walkway 20 is easy to cove and weld. It achieves PTV ≥ 36 on the pendulum test giving sustained slip resistance throughout the lifetime of the product. It also includes PUR cleanability, superior chemical and stain resistance.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



My Fro Yo Cup



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Matches:

- Altro XpressLay
- Looks great with:
- Altro Whiterock
 - Altro Aquarius
 - Altro XpressLay
 - Altro Wood Smooth Acoustic




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk







Black
VM20892 LRV: 6
WR100 / A1M100



Fog*
VM20153 LRV: 27
WR81 / A1M81




Lupin
VMI2059 LRV: 17
WR286 / A1M286




Coal
VMI2058 LRV: 6
WR100 / A1M100




Midnight
VM20421 LRV: 11
WR72 / A1M72




Blue
VM20412 LRV: 22
WR71 / A1M71




River
VMI2057 LRV: 22
WR71 / A1M71




Nightfall
VMI2056 LRV: 10
WR72 / A1M72




Dolphin
VM2010 LRV: 21
WR86 / A1M86




Cloud
VM2014 LRV: 41
WR79 / A1M191




Blizzard
VMI2055 LRV: 44
WR79 / A1M191




Whale
VMI2054 LRV: 20
WR86 / A1M86




Skyline
VM20332 LRV: 24
WR52 / A1M52




Biscuit
VM20907 LRV: 30
WR146 / A1M20



Winter
VMI2053 LRV: 61
WR105 / A1M01



Tarragon
VMI2052 LRV: 26
WR52 / A1M52



Tundra
VM20910 LRV: 17
WR153 / A1M239



For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches. Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm




Samples
If colour choice is critical, please request a sample of the material.


☎ **01462 707 700**
✉ **samples@altro.com**




*Indicates static dissipative grade available. For code use standard product code followed by 'SD'. Due to the addition of static dissipative properties, Altro Walkway 20 SD does not have exactly the same appearance as that shown above. Includes Altro Easyclean Original Technology.

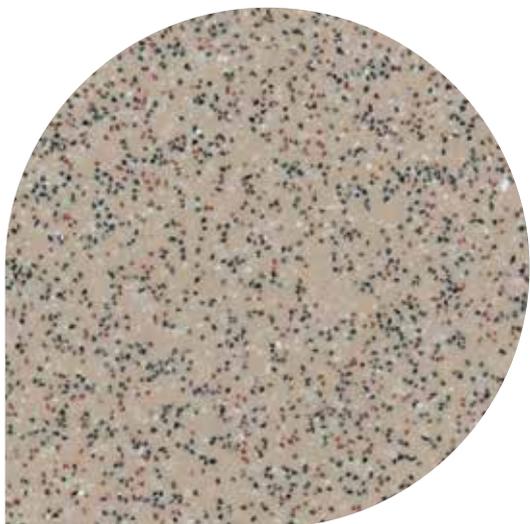


Bone
VM20215 LRV: 37
WR20 / A1M20



Sand
VMI2051 LRV: 40
WR20 / A1M20




Savannah
VMI2050 LRV: 19
WR153 / A1M239




Waterfall
VM20912 LRV: 31
WR155 / A1M135




Tango
VM2031 LRV: 14
WR42 / A1M42




Cherry
VM20920 LRV: 10
WR148 / A1M148




Silk
VMI2003P LRV: 10
WR310 / A1M35




Temple
VM2009P LRV: 27
WR261 / A1M81




Streetlight
VMI2005P LRV: 45
WR287 / A1M79



Rock
VMI2004P LRV: 23
WR84 / A1M84



Fresco
VMI2017P LRV: 31
WR309 / A1M309



Stream
VM2001P LRV: 22
WR288 / A1M71



Centro Residencial Valdeluz

! We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.

Matches:

- **Altro XpressLay**


Looks great with:

- **Altro Whiterock**
- **Altro Aquarius**
- **Altro Wood Smooth Acoustic**


globe Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




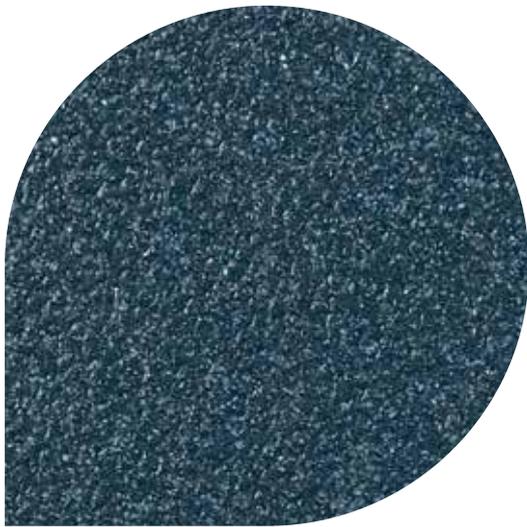


Runway
VM2006P LRV: 9
WR72 / A1M72




Pavement
VMI2007P LRV: 14
WR83 / A1M83



Signal
VMI2016P LRV: 13
WR300 / A1M42



Swan
VMI2012P LRV: 75
WR291 / A1M01




Minster
VM2018P LRV: 40
WR289 / A1M265




Pitch
VM2020P LRV: 5
WR277 / A1M100




Forge
VM2015P LRV: 9
WR248 / A1M238




Arena
VM2019P LRV: 41
WR297 / A1M20




Monument
VMI2008P LRV: 23
WR305 / A1M239




Gallery
VM2011P LRV: 10
WR62 / A1M62



Mallard
VMI2013P LRV: 13
WR302 / A1M302



Roof Garden
VM2000P LRV: 23
WR262 / A1M154



Gecko
VMI2002P LRV: 18
WR308 / A1M308



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details..

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm



Samples

If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**

✉ **samples@altro.com**



Asian Games

Altro XpressLay™ adhesive-free safety floor

Patent number GB 2 462 167

Typical applications:

General purpose for areas where the ability to easily remove and recycle post installation plays an important part in your requirements for sustainable flooring finishes.

The world's first ever adhesive-free safety floor that can save you money on materials, time on installation and offers you unrivalled sustainability credentials.

Revolutionary Altro XpressLay is a step change in the evolution of safety flooring. It's installed using a tape system instead of adhesive, so can be installed without a surface damp-proof membrane (DPM). It can be easily removed post-installation, re-used elsewhere and then at the end of its life be recycled.

The range boasts 42 colours and matches with Altro Walkway 20 enabling you to combine the use of both ranges to suit the application.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



Product of the Year 2015
CFJ/CFA Flooring Industry Awards



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.



Matches:

- Altro Walkway 20

Looks great with:

- Altro Whiterock
- Altro Aquarius
- Altro Wood Smooth Acoustic




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk







Black
XL22892 LRV: 6
WR100 / A1M100



Fog
XL22153 LRV: 27
WR81 / A1M81




Lupin
XL12259 LRV: 17
WR286 / A1M286




Coal
XL12258 LRV: 6
WR100 / A1M100




Midnight
XL22421 LRV: 11
WR72 / A1M72




Blue
XL22412 LRV: 22
WR71 / A1M71




River
XL12257 LRV: 22
WR71 / A1M71




Nightfall
XL12256 LRV: 10
WR72 / A1M72




Dolphin
XL2210 LRV: 21
WR86 / A1M86




Cloud
XL2214 LRV: 41
WR79 / A1M191




Blizzard
XL12255 LRV: 44
WR79 / A1M191




Whale
XL12254 LRV: 20
WR86 / A1M86




Skyline
XL22332 LRV: 24
WR52 / A1M52




Biscuit
XL22907 LRV: 30
WR146 / A1M20



Winter
XL12253 LRV: 61
WR105 / A1M01



Tarragon
XL12252 LRV: 26
WR52 / A1M52



Tundra
XL22910 LRV: 17
WR153 / A1M239



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2.2mm




Samples


If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**


✉ **samples@altro.com**

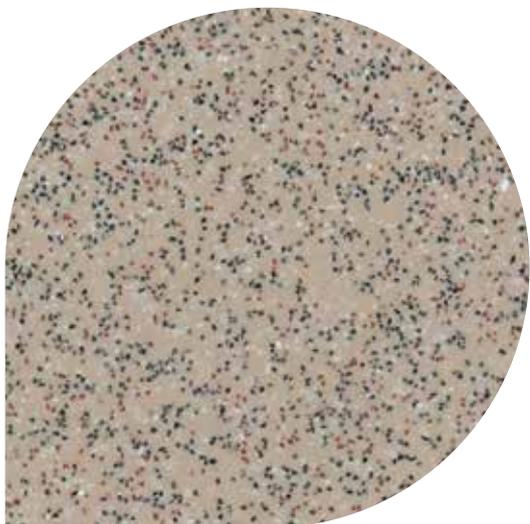


Bone
XL22215 LRV: 37
WR20 / A1M20



Sand
XLI2251 LRV: 40
WR20 / A1M20




Savannah
XLI2250 LRV: 19
WR153 / A1M239




Waterfall
XL22912 LRV: 31
WR155 / A1M135




Tango
XL2231 LRV: 14
WR42 / A1M42




Cherry
XL22920 LRV: 10
WR148 / A1M148




Silk
XLI2203P LRV: 10
WR310 / A1M35




Temple
XL2209P LRV: 27
WR261 / A1M81



Streetlight
XLI2205P LRV: 45
WR287 / A1M79




Rock
XLI2204P LRV: 23
WR84 / A1M84



Fresco
XLI2217P LRV: 31
WR309 / A1M309



Stream
XL2201P LRV: 22
WR288 / A1M71

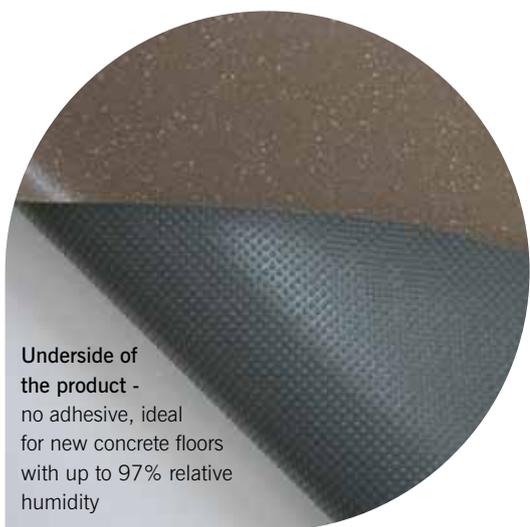

Underside of the product -
no adhesive, ideal for new concrete floors with up to 97% relative humidity

! We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.

Matches:

- **Altro Walkway 20**


Looks great with:

- **Altro Whiterock**
- **Altro Aquarius**
- **Altro Wood Smooth Acoustic**

globe icon Contributes to reducing the environmental impact of your specification:


- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk



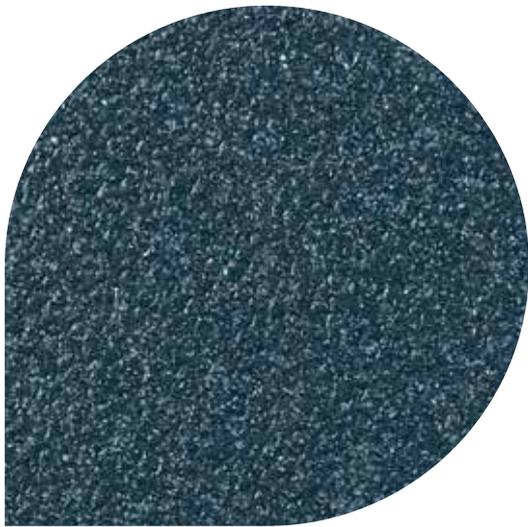


Runway

XL2206P LRV: 9
WR72 / A1M72




Pavement

XLi2207P LRV: 14
WR83 / A1M83



Signal

XLi2216P LRV: 13
WR300 / A1M42



Swan

XLi2212P LRV: 75
WR291 / A1M01



Minster

XL2218P LRV: 40
WR289 / A1M265




Pitch

XL2220P LRV: 5
WR277 / A1M100



Forge

XL2215P LRV: 9
WR248 / A1M238




Arena

XL2219P LRV: 41
WR297 / A1M20




Monument

XLi2208P LRV: 23
WR305 / A1M239




Gallery

XL2211P LRV: 10
WR62 / A1M62




Mallard

XLi2213P LRV: 13
WR302 / A1M302



Roof Garden

XL2200P LRV: 23
WR262 / A1M154



Gecko

XLi2202P LRV: 18
WR308 / A1M308



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2.2mm



Samples

If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**

✉ **samples@altro.com**



Sure Start

Altro Impressionist™ II

Typical applications:

A versatile product. Please check with us for guidance with your specific project requirements.

One of our first decorative safety floorings, Altro Impressionist II features coloured chips set in a complementary background to give you more scope for coordination with your wall cladding and other fittings.

These coloured chips are fused to the main body of the flooring for durability and appearance retention. Altro Impressionist II also provides excellent chemical resistance.

Altro Easyclean™ Original Technology is included to make cleaning and maintenance easy.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.


See www.altro.co.uk/safety for more information.




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




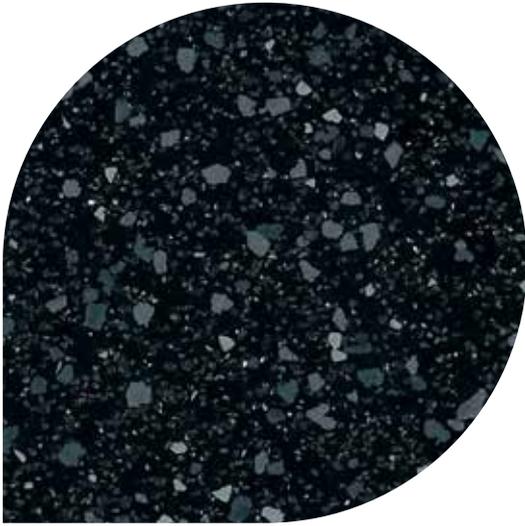


Ebony
IP2001 LRV: 6
WR100 / A1M100




Oasis
IP2011 LRV: 49
WR136 / A1M136




Arctic
IP2012 LRV: 49
WR11 / A1M11




Adobe
IP2008 LRV: 32
WR24 / A1M27




Zen
IP2015 LRV: 34
WR137 / A1M137




Stucco
IP2013 LRV: 61
WR105 / A1M1




Canvas
IP2009 LRV: 48
WR12 / A1M12




Ore
IP2004 LRV: 26
WR81 / A1M81




Lunar
IP2005 LRV: 36
WR85 / A1M85



Tranquil
IP2017 LRV: 21
WR71 / A1M71



Mineral
IP2003 LRV: 14
WR83 / A1M83



Aqua
IP2018 LRV: 38
WR135 / A1M135



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.
Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm

Samples
If colour choice is critical, please request a sample of the material.
01462 707 700
samples@altro.com





North Hertfordshire College

Altro Suprema™

Patent number GB 2 462 167

Typical applications:

- Indoor public spaces which are mainly subjected to foot (not wheeled) traffic, including lobbies, entrance areas, corridors.**
- Classrooms (for labs and CDT areas, see Altro Walkway 20 SD and Altro Classic 25).**
- Hospital wards and corridors.**

Looking for that designer feel in a safety flooring? Look no further than Altro Suprema – a stunning, non-sparkle safety floor that gives you complete design freedom. With 12 new colours including three ‘flake’ designs, one of its 40 shades will match the mood you want to create.

Design-led Altro Suprema has been developed in consultation with colour consultants, architects and end users to reflect design requirements and interior trends.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Looks great with:

- **Altro Whiterock White**
- **Altro Whiterock Chameleon**
- **Altro Whiterock Digiclad**
- **Altro Aquarius**
- **Altro Unity 25**
- **Altro Classic 25**
- **Altro Designer 25**




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk







Sugar
SU2042 LRV: 65
WR284 / A1M01



Alaska
SUD2079 LRV: 49
WR374 / A1M79




Chinchilla
SU2078 LRV: 19
WR373 / A1M86




Fossil
SUI2067 LRV: 12
WR232 / A1M82




Snowflake
SUD2076 LRV: 71
WR284 / A1M01




Wolf
SU2050 LRV: 29
WR261 / A1M81




Wallaby
SUI2080 LRV: 14
WR375 / A1M82



Raven
SU2054 LRV: 7
WR277 / A1M100




Dew
SU2036 LRV: 45
WR191 / A1M191



Montana
SUD2077 LRV: 27
WR372 / A1M81



Flamingo
SU2063 LRV: 16
WR276 / A1M276



Flint
SU2034 LRV: 13
WR82 / A1M82



Berry
SU2059 LRV: 8
WR275 / A1M44



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm

Samples
If colour choice is critical, please request a sample of the material.

01462 707 700
samples@altro.com






Parchment
SU2041 LRV: 45
WR267 / A1M20



Owl
SUI2068 LRV: 40
WR20 / A1M20




Taupe
SU2040 LRV: 23
WR282 / A1M239




Loam
SU2047 LRV: 8
WR260 / A1M260



Calico
SUI2069 LRV: 52
WR283 / A1M20



Oatmeal
SU2046 LRV: 38
WR265 / A1M265



Platypus
SU2075 LRV: 13
WR371 / A1M371


NEW




Lava
SUI2070 LRV: 8
WR260 / A1M260



Prairie
SU2044 LRV: 31
WR279 / A1M20




Earth
SUI2066 LRV: 23
WR282 / A1M239




Lipstick
SU2085 LRV: 9
WR380 / A1M238

NEW




Tuscany
SU2084 LRV: 13
WR379 / A1M42

NEW



Bee
SU2083 LRV: 40
WR378 / A1M378

NEW



Tangerine
SU2052 LRV: 20
WR273 / A1M273

 We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.


 Looks great with:

- **Altro Whiterock White**
- **Altro Whiterock Chameleon**
- **Altro Whiterock Digiclad**
- **Altro Aquarius**
- **Altro Unity 25**
- **Altro Classic 25**
- **Altro Designer 25**


 Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




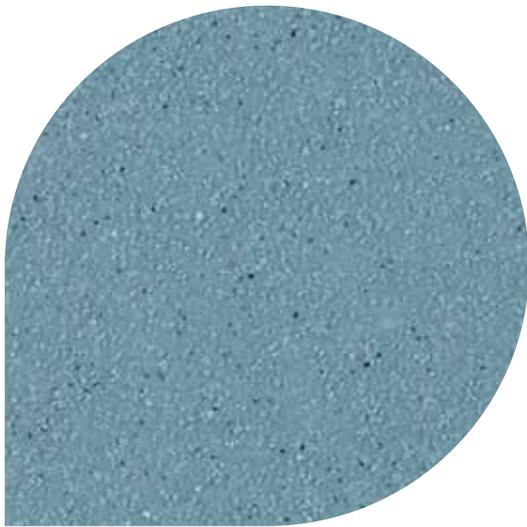


Bubble
SU2039 LRV: 34
WR285 / A1M203




Caspian
SU2038 LRV: 18
WR194 / A1M71




Aegean
SU2057 LRV: 23
WR270 / A1M56




Shadow
SU2056 LRV: 24
WR269 / A1M84



Bluewater
SUI2073 LRV: 17
WR194 / A1M71




Malibu
SU2062 LRV: 26
WR272 / A1M272



Barbados
SU2081 LRV: 13
WR376 / A1M302


NEW



Platinum
SUI2064 LRV: 24
WR201 / A1M84



Bluebird
SU2037 LRV: 10
WR231 / A1M73




Melon
SU2061 LRV: 33
WR271 / A1M271




Citrus
SU2086 LRV: 45
WR381 / A1M381

NEW



Fennel
SU2049 LRV: 25
WR262 / A1M154



Basil
SU2082 LRV: 16
WR377 / A1M308

NEW



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm



Samples

If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**

✉ **samples@altro.com**



Nestlé

Altro Wood Safety™ Patent number GB 2 462 167

Typical applications:

Public spaces which are mainly subject to foot traffic, such as entrance areas, care home corridors, school corridors. Student accommodation.

When you want to create a homely, comforting and familiar look but you don't want to compromise on safety, Altro Wood Safety is ideal. The range offers 16 wood-look designs, including classic, contemporary classic and on-trend – so you can vary the mood from cool and classy to warm and nurturing.

Altro Wood Safety works well with contemporary décor such as metal and glass areas, mood lighting, vibrant colours and monotone themes. It's a great choice if you need to avoid any colour clashes.

The flooring features Altro EasyClean Maxis PUR Technology for long term cleanability and easier maintenance.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



Green Pastures Care Home



Matches:

- Altro Wood Smooth and Altro Wood Smooth Acoustic – see pages 152 – 155



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Looks great with:

- Altro Whiterock White
- Altro Whiterock Satins
- Altro Whiterock Chameleon
- Altro Aquarius



Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk





Bleached Oak
WSA2001 LRV: 52
WR335 / A1M335



Autumn Maple
WSA2005 LRV: 24
WR339 / A1M339



Farmhouse Oak
WSA2004 LRV: 38
WR338 / A1M27



Beech Comber
WSA2008 LRV: 36
WR342 / A1M224



Vintage Cherry
WSA2002 LRV: 22
WR336 / A1M239



Urban Cherry
WSA2003 LRV: 17
WR337 / A1M337



Rustic Oak
WSA2006 LRV: 37
WR340 / A1M340



Seasoned Cherry
WSA2009 LRV: 15
WR343 / A1M246



Walnut Noir
WSA2011 LRV: 6
WR345 / A1M62



Century Oak
WSA2012 LRV: 8
WR346 / A1M62



Antique Walnut
WSA2007 LRV: 15
WR341 / A1M160



Heritage Maple
WSA2010 LRV: 10
WR344 / A1M41



Oak Riche
WSA2014 LRV: 10
WR227 / A1M227



Manor Oak
WSA2016 LRV: 7
WR348 / A1M200



Washed Oak
WSA2015 LRV: 38
WR347 / A1M200



Oak Traditions
WSA2013 LRV: 25
WR353 / A1M225



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm



Samples

If colour choice is critical, please request a sample of the material.

01462 707 700

samples@altro.com

Guide to matching wood flooring

Altro Wood™ collection

The Altro Wood collection consists of different types of flooring available in the same designs, enabling you to install them alongside each other without compromising on aesthetics.

The flooring types available for each design are indicated below, with details of matching accessories and Light Reflectance Values (LRVs).

Flooring type guide

Altro Wood Safety™

Altro Wood Smooth™

Altro Wood Smooth Acoustic™

Weld rods / mastics / LRVs



Bleached Oak WSA2001
White Oak WSM2051

WR335 / A1M335 / LRV 52



Autumn Maple WSA2005
Light Maple WSM2055

WR339 / A1M339 / LRV 24



Farmhouse Oak WSA2004
Flaxen Oak WSM2054
Hush WSMA3781

WR338 / A1M27 / LRV 38



Beech Comber WSA2008
Warm Beech WSM2058
Haven WSMA3783

WR342 / A1M224 / LRV 36



Vintage Cherry WSA2002
Pale Cherry WSM2052

WR336 / A1M239 / LRV 22



Urban Cherry WSA2003
Classic Cherry WSM2053

WR337 / A1M337 / LRV 17



Rustic Oak WSA2006
Mellow Oak WSM2056

WR340 / A1M340 / LRV 37



Seasoned Cherry WSA2009
Rich Cherry WSM2059
Karma WSMA3784

WR343 / A1M246 / LRV 15



Walnut Noir WSA2011
Mature Walnut WSM2061

WR345 / A1M62 / LRV 6



Century Oak WSA2012
Mature Oak WSM2062

WR346 / A1M62 / LRV 8



Antique Walnut WSA2007
Mid Walnut WSM2057
Lull WSM3782

WR341 / A1M160 / LRV 15



Heritage Maple WSA2010
Red Maple WSM2060

WR344 / A1M41 / LRV 10



Oak Riche WSA2014
Victorian Oak WSM2070

WR227 / A1M227 / LRV 10



Manor Oak WSA2016
Black Oak WSM2064

WR348 / A1M200 / LRV 7



Washed Oak WSA2015
Greyed Oak WSM2063


WR347 / A1M200 / LRV 38



Oak Traditions WSA2013
Forest Oak WSM2069

WR353 / A1M225 / LRV 25

Light Reflectance Values measured in accordance with BS8493:2008. Exact material match with samples cannot be guaranteed.
Codes: **WR** = weld rod, **A1M** = mastic, **LRV** = light reflectance value.

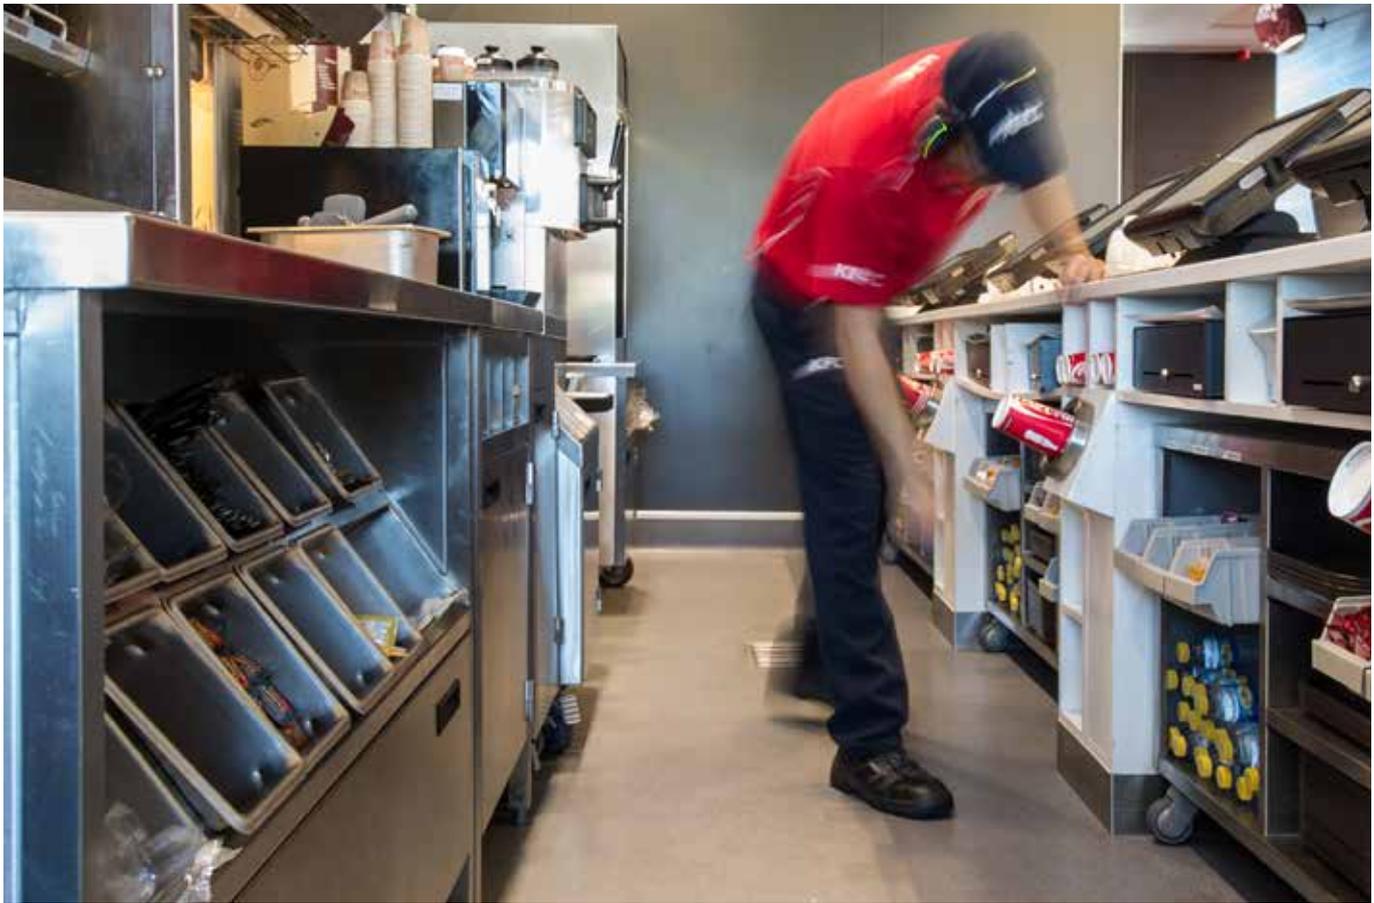

KFC Málaga

Altro Stronghold™ 30

Typical applications:

Kitchens. Canteens. Food preparation and service areas.
Areas where grease, oils or fats are present.

Water underfoot is treacherous enough – add grease, oils and fats, and you've got a dangerous environment. So, for commercial kitchens, canteens, food preparation and service areas, it's essential to select flooring that will help catering staff do their job safely.

Altro Stronghold 30 achieves Altro's highest rating for slip resistance (PTV ≥ 55 , R12) and is designed to minimise risk in wet and greasy conditions for the lifetime of the flooring. As well as helping to keep staff safe from slips, it also helps reduce their fatigue, thanks to its 3mm thickness which provides noise reduction and comfort underfoot.

Altro Stronghold 30 is frequently specified with Altro Whiterock hygienic wall cladding to create safe and hygienic environments in commercial and industrial kitchens.

For specialist locations such as bathrooms and wet rooms we recommend Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.



Looks great with:

- Altro Whiterock White
- Altro Whiterock Satins
- Altro Classic 25
- Altro resins




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk







Abyss
K3001 LRV: 7
WR100 / A1M100




Monsoon
K30153 LRV: 24
WR81 / A1M81




Surf
K30412 LRV: 20
WR71 / A1M71




Lagoon
K30910 LRV: 7
WR39 / A1M34




Tundra
K30500 LRV: 17
WR153 / A1M239




Camel
K3017 LRV: 26
WR64 / A1M239




Skyline
K30332 LRV: 24
WR52 / A1M52



Velvet
K30365 LRV: 8
WR256 / A1M148




Russet
K30262 LRV: 14
WR41 / A1M41




Maple
K30522 LRV: 31
WR24 / A1M27



Midnight
K30421 LRV: 11
WR72 / A1M72



Oyster
K30215 LRV: 36
WR20 / A1M20



Dolphin
K3010 LRV: 21
WR86 / A1M86



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.
Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions	2m x 15m
Format	ROLL
Thickness	3mm

Samples
If colour choice is critical, please request a sample of the material.
01462 707 700
samples@altro.com





US Naval base

Altro Atlas™ 40

Typical applications:

Industrial areas exposed to heavy wheeled traffic such as pallet trucks and occasional forklift traffic (for more intense forklift traffic, an Altro resin is more suitable).
Sports changing rooms where spiked or studded shoes / boots are used.
Mezzanine areas.

Tough as old boots...and new boots, steel toe-capped work boots and studded football boots. Altro Atlas 40 is our most robust safety flooring, maintaining its integrity even when punctured by studs or spikes. It's well suited to heavy duty industrial use and sports changing rooms.

Hard wearing, stable, and resistant to mechanical damage and chemicals, Altro Atlas 40 provides long term durability and slip resistance, and is easy to clean and maintain.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30. For bathrooms and wet rooms we recommend Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Looks great with:


- **Altro Whiterock White**
- **Altro Whiterock Satins**
- **Altro resins**




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




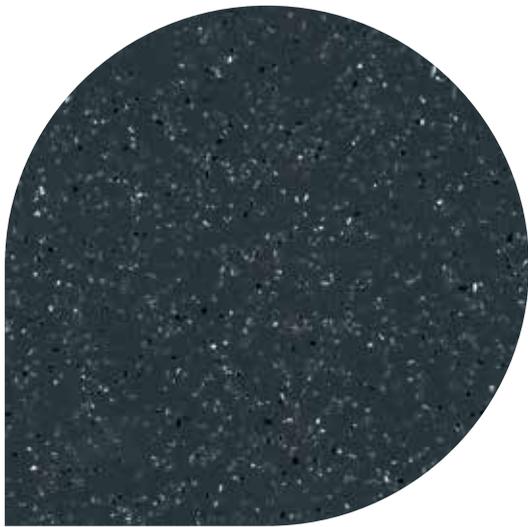


Anvil
X4094 **LRV: 11**
WR101 / A1M72




Mushroom
X4042 **LRV: 32**
WR24 / A1M27



Walnut
X4086 **LRV: 10**
WR62 / A1M62



Quarry Red
X4060 **LRV: 13**
WR42 / A1M42



Pewter Grey
X4039 **LRV: 26**
WR81 / A1M81



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches. Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 12.5m
Format ROLL
Thickness 4mm



Samples

If colour choice is critical, please request a sample of the material.

01462 707 700
samples@altro.com





Worcester Royal Hospital MLU

Altro Aquarius™

Patent number GB 2 462 167

Typical applications:

**Bathrooms. Showers. Changing rooms.
Swimming pool surrounds. Saunas.**

You asked – we delivered. Inspired by customer feedback, Altro Aquarius was developed for lasting performance in wet and dry, shoes or barefoot. Achieving a PTV ≥ 50 and Class B to DIN51097 for barefoot use, Altro Aquarius provides optimum lifetime sustained slip-resistance in wet and dry environments.

Now with four new shades to choose from, this extended range features plain and tonal chip options, including an on-trend indigo shade to help you achieve high contrast and design flexibility.

It's a 2mm safety floor that has been extensively tested on a variety of shoe types to ensure top performance in a host of environments – bathrooms, changing areas, hospital wards. Anywhere you can expect a wet and dry floor environment. It's also easy to clean, with Altro Easyclean Maxis PUR technology, meaning it's at the forefront of safety floor cleaning.


No longer do you have to choose between studded or standard safety flooring. With Altro Aquarius you can have it all. Good looks and comfort, without compromising on safety.

For specialist locations such as kitchens, canteens and food preparation areas, where grease, oils or fats may be present, we recommend Altro Stronghold 30.

 We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages. See www.altro.co.uk/safety for more information.

 Looks great with:

- **Altro Whiterock Satins**
- **Altro Whiterock Chameleon**
- **Altro Suprema**
- **Altro Walkway 20**

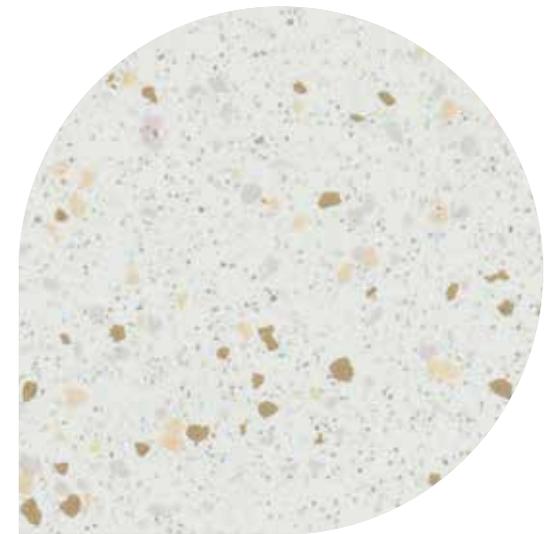


Swan

AQI2012 LRV: 75
WR291 / A1M01


 Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk







Terrapin
AQI2009 LRV: 40
WR289 / A1M265



Vole
AQI2010 LRV: 43
WR289 / A1M265




Walrus
AQI2007 LRV: 29
WR261 / A1M81




Tern
AQI2008 LRV: 31
WR261 / A1M81




Hippo
AQI2013 LRV: 11
WR301 / A1M82




Iguana NEW
AQI2021 LRV: 41
WR297 / A1M20




Otter
AQI2006 LRV: 26
WR290 / A1M239



Puffin
AQI2005 LRV: 46
WR287 / A1M79




Cygnet
AQI2004 LRV: 46
WR287 / A1M79




Salamander
AQI2011 LRV: 41
WR294 / A1M294




Gosling NEW
AQI2023 LRV: 59
WR369 / A1M369




Sea Snail NEW
AQI2024 LRV: 50
WR370 / A1M370




Dragonfly
AQI2001 LRV: 33
WR292 / A1M292




Blue Penguin
AQI2002 LRV: 24
WR288 / A1M71



Newt NEW
AQI2022 LRV: 10
WR368 / A1M368




Treefrog
AQI2003 LRV: 33
WR293 / A1M271



Coral Crab
AQI2014 LRV: 14
WR300 / A1M42



Spoonbill
AQI2016 LRV: 11
WR303 / A1M303



Mallard
AQI2015
WR302 / A1M302



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches.

Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm



Samples

If colour choice is critical, please request a sample of the material.

☎ **01462 707 700**

✉ **samples@altro.com**



Dunfermline High School

Altro Marine™ 20

Typical applications:

Shower cubicles. Foot wash areas at swimming pools.

Did you know that dimples can help you stay upright in the shower? Altro Marine 20 has a dimpled surface that's specially designed for bare feet in shower cubicles where you need Class C. It provides excellent slip resistance but still feels comfortable underfoot.

Altro Marine 20's hardwearing construction makes it resistant to most chemicals and indentation, and it's easy to maintain, so it will keep looking good and performing well for longer.

For other wet areas, see Altro Aquarius.



We strongly recommend carrying out a risk assessment in any area in which the installation of safety flooring is considered, focusing on the potential risk posed by contaminants from spillages.

See www.altro.co.uk/safety for more information.



Looks great with:


- Altro Whiterock Satins
- Altro Whiterock Chameleon
- Altro Aquarius




Contributes to reducing the environmental impact of your specification:

- A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk




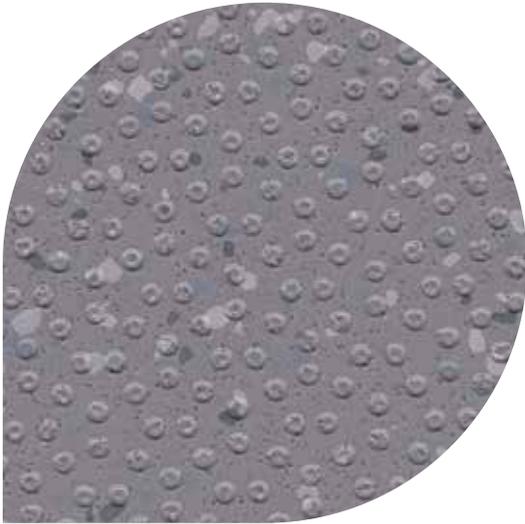

Shark
IPT20812 LRV: 24
WR201 / A1M84




Gull
T20813 LRV: 46
WR79 / A1M191




Seagrass
IPT20814 LRV: 37
WR137 / A1M137



Cascade
IPT20809 LRV: 71
WR105 / A1M01




Marlin
T20811 LRV: 34
WR203 / A1M203




Fen
IPT20815 LRV: 19
WR242 / A1M242




Reef
T20801 LRV: 41
WR20 / A1M20



Tide
IPT20808 LRV: 21
WR71 / A1M71



Rainfall
IPT20810 LRV: 43
WR135 / A1M135



Steam
IPT20807 LRV: 37
WR85 / A1M85



i For a co-ordinated appearance, colour matched **Weldrods (WR)** and **Mastics (A1M)** are available. You'll find their product codes under the relevant swatches. Please see technical chart on pages 80-81 for full details.

LRV = Light Reflectance Value

Dimensions 2m x 20m
Format ROLL
Thickness 2mm

Samples
If colour choice is critical, please request a sample of the material.
01462 707 700
samples@altro.com